


TYPICAL PRE-INSULATED FLOW & RETURN PIPE TRENCH SECTION



TYPICAL PRE-INSULATED TWIN-PIPE TRENCH SECTION

| DIN (CARRIER / CASING) | A (mm) | B (mm) | W (mm) | H (mm) | DIN (CARRIER / CASING) | A (mm) | B (mm) | W (mm) | H (mm) |
|------------------------|--------|--------|--------|--------|------------------------|--------|--------|--------|--------|
| DIN 80 / 160 | 150 | 150 | 770 | 860 | DIN 400 / 560 | 200 | 200 | 1500 | 1150 |
| DIN 100 / 200 | 150 | 150 | 850 | 900 | DIN 500 / 630 | 200 | 200 | 1720 | 1260 |
| DIN 125 / 225 | 150 | 150 | 900 | 925 | DIN 700 / 900 | 200 | 200 | 1910 | 1330 |
| DIN 150 / 250 | 150 | 150 | 950 | 950 | DIN 600 / 800 | 250 | 300 | 2400 | 1500 |
| DIN 300 / 450 | 200 | 200 | 1400 | 1100 | DIN 700 / 900 | 250 | 300 | 2600 | 1600 |

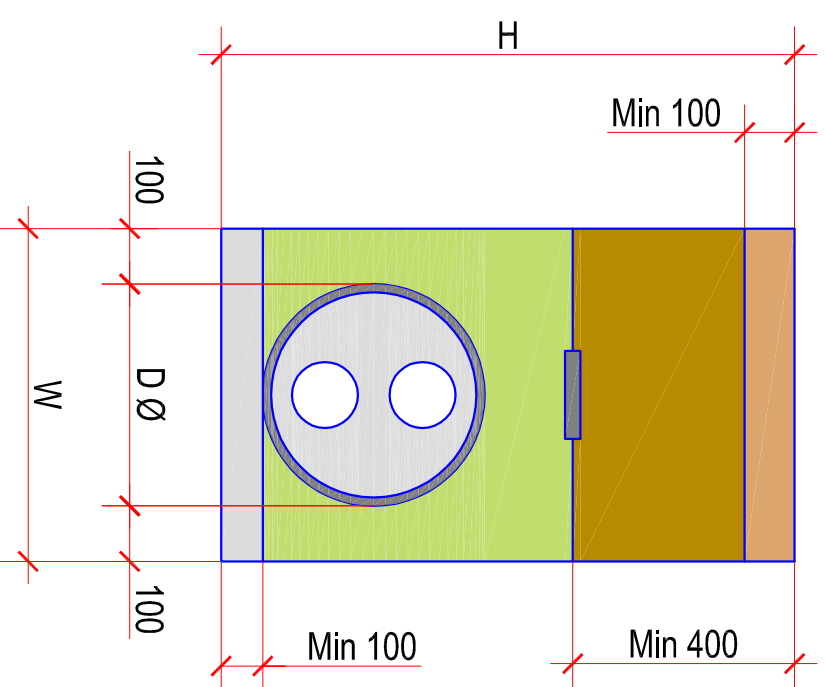

Service Piping Installation
Typical Trenching Details

| | | |
|----------------|--------------|-------------|
| Drawn By | CHK By | Released |
| RTS | RTS | |
| Date | Date | Description |
| FEB 18 | FEB 18 | |
| Drawn By | CHK By | Description |
| PAM | RTS | |
| Date | Date | Description |
| FEB 2018 | FEB 2018 | |
| Project Number | Sheet Number | Sheet Title |
| DG | 4.3c | R1 |